




RITCH™ Hydraulic Folding Truck Mounted Crane

Part Number
REN5AG

FEATURES

- Complies with Australian Standards AS/NZS 1418.9-1996
- Full 360° rotation on taper roller and ball bearings
- Gear crank slew for easy, positive operation
- Compact design occupies minimum load space
- Manual hydraulic operation
- Extendable boom
- Quality, fully-welded construction
- Supplied with high quality alloy hook
- Fabricated in Australia

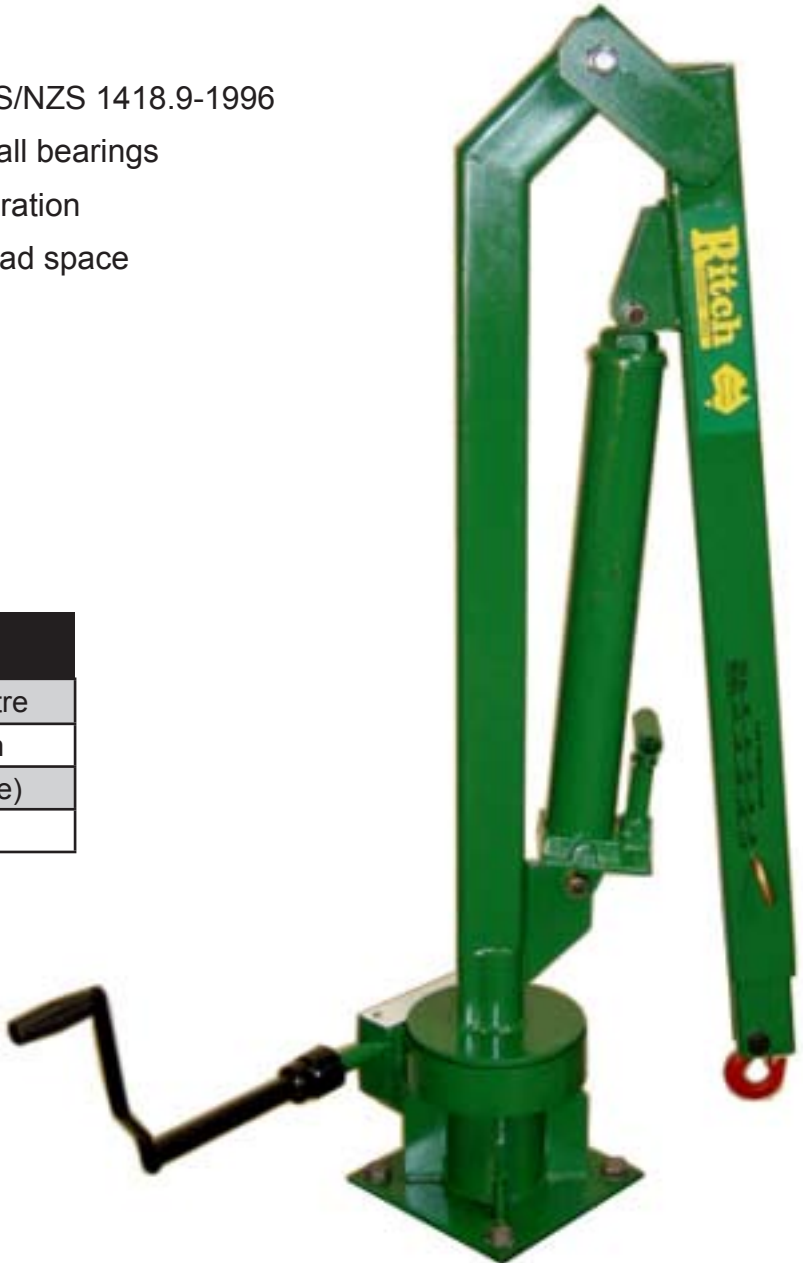

NOTE: Part Number **REN5A** is available with manual push slew and locking collar

SPECIFICATIONS

| | REN5AG |
|-----------------------|--------------------|
| Working Load Limit | 500kg @ 1.135metre |
| Crane Height (closed) | 250mm x 250mm |
| Closed Lift Height | 675mm (Adjustable) |
| Maximum Lift Height | 1710mm |

IMPORTANT!

These cranes have been designed and made in Australia to comply with Australian Standard Requirement AS1418.9

These cranes must be installed and tested in accordance with section 11 of this Australian Standard. The manufacturer or reseller accepts no liability for product not installed in accordance with this section.

Extendable Boom Safe Working Loads

| | | | | | |
|----------|-------|-------|-------|-------|-------|
| Metres | 1.135 | 1.285 | 1.435 | 1.585 | 1.735 |
| SWL / kg | 500 | 400 | 350 | 300 | 250 |



RITCH™ Hydraulic Folding Truck Mounted Crane

Part Number
REN5APG



FEATURES

- Complies with Australian Standards AS/NZS 1418.9-1996
- Full 360° rotation on taper roller and ball bearings
- Gear crank slew for easy, positive operation
- Compact design occupies minimum load space
- Double acting cylinder
- Powered by an independent 12v or 24v power pack
- Complete with counter balance valve on cylinder
- Operated by remote control
- Quality, fully-welded construction
- Supplied with high quality alloy hook
- Optional, Hydraulic boom extension and slewing
- Fabricated in Australia

SPECIFICATIONS

REN5APG

| | |
|-----------------------|--------------------|
| Working Load Limit | 500kg @ 1.135metre |
| Crane Height (closed) | 1330mm |
| Closed Lift Height | 890mm |
| Maximum Lift Height | 1710mm |

IMPORTANT!

These cranes have been designed and made in Australia to comply with Australian Standard Requirement AS1418.9

These cranes must be installed and tested in accordance with section 11 of this Australian Standard. The manufacturer or reseller accepts no liability for product not installed in accordance with this section.

Extendable Boom Safe Working Loads

| | | | | | |
|----------|-------|-------|-------|-------|-------|
| Metres | 1.135 | 1.285 | 1.435 | 1.585 | 1.735 |
| SWL / kg | 500 | 400 | 350 | 300 | 250 |