



STENHØJ



MOBILE 72 - ELECTRO-HYDRAULIC MOBILE LIFT

7200kg working load limit per post


IMPORTER:

Karmot Pty Ltd
Unit D, 26 Penny Place, ARNDELL PARK NSW 2148

Sydney Ph: +61 2 9622 7388 Fax: +61 2 9622 3922
Melbourne Ph: +61 3 9753 6653 Fax: +61 3 9753 6654
Brisbane Ph: 0421 288 811

Email: karmot@karmot.com
Web: www.karmot.com

DISTRIBUTOR:

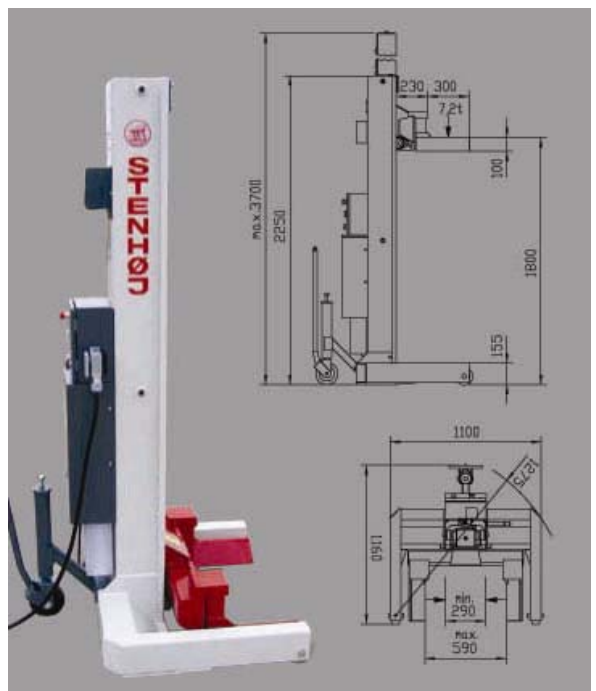



MOBILE 72

7200kg per post WLL

- Large clearance between wheel stop and post. Safety clearance column-vehicle 230mm

- Integrated towing jack on each post. Spring-loaded, self lowering when being loaded, no manual lifting / lowering required. Adjustable high ground clearance. Brake to prevent column's movement.

- Adjustable wheel support for all wheel sizes. No separate adaptors required.

- All wheel sizes - 155R13 -13R22.50 (D= 550 -1140mm).

- Protected cylinder inside post. Piston rod covered by lifting carriage, running on bearings.



MOBILE 72

- | | |
|------------------|---|
| Lifting capacity | 7200kg per post (4- or 6- post lifts) |
| Lifting time | 135 sec. |
| Lifting height | 1800mm |
| Motor | 1.1kW per post |
| Drive | Direct acting hydraulic lifting cylinder, hydraulic power unit. Load way / cylinder stroke - 1 : 1 |
| Load Safety | Hydraulic safety check valve. Additional mechanical all position lock. |
| Control | Automatic synchronisation control. Supervision of all functions. Robust control system with mini-relays. Based on pluggable circuit boards, easy to exchange. |
| Operation | From any column: up/down/emergency-stop
Operation of up to 6 columns by standard. |
| Cable Connection | Pluggable cable connection from column to column around the vehicle. Short walking ways, short set-up time. Working area underneath vehicle free of cables. 10m power supply cable at master column. Only 16 Amps fuses required at site, even for 6 columns. 10m cable per post inclusive in the delivery. |
| Dimensions | (L)1165x(W)1100x(H)2250 mm |
| Standard Colours | Red RAL 3013 / white RAL 9002
Special colour combinations available on request. |
- We offer a large program of optional extras. Ask for separate brochure.
 - No liability accepted for specifications, which are subject to alteration.
 - Lifting cylinder self-lubricating, maintenance free.
 - Hydraulic drive nearly maintenance-free.
 - Besides the 4 carriage rollers, no moving mechanical parts.
 - Use indoor and outdoor on concrete surface.